



## L40/L41 Series T1 Rear Mount Panel LED

### Special Features

- Rear mounting friction fit- no mounting hardware require
- Custom housing lengths and lead lengths available
- Optional internal resistor – can be customized for AC applications
- Sealed against moisture and dust - IP66 sealing available
- Fits panel thickness .031" (0.79mm), .060" (1.52 mm)
- .125" (3.18 mm), .187" (4.75 mm), and .220" (5.59 mm)
- Wide selection of wire sizes and types – including Mil Spec MIL-W-22759/33 wire
- Ganged LED assembly with connector built to your spec


### Specifications

- Mounting hole: .187" ± .001" (4.75 ± .03 mm)
- Termination: 22AWG UL1061 6.0"(152.4 mm) gray (anode) and black (cathode) leads stripped .250" (6.35 mm) standard or LED pins
- Housing: Black butyrate plastic



3mm Panel Mount LED Assemblies

### Package Dimensions

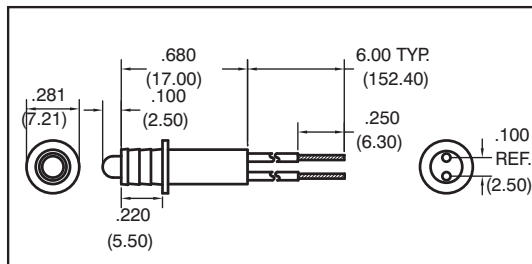

All dimensions are in inches (mm)

### Resistor Chart


OPERATING SPECIFICATIONS				
Resistor Value Code	Voltage	Current (mA)	Resistor Value (Ohms) Green, Yellow Red, Bicolor LED	Resistor Value (Ohms) Blue, White LED
0000	2	10 or 20	None	Not Available
9900	5	10		
9928	5	10		121
9901	12	10	1000	
9902	12	10		715
9903	24	10	2210	
9904	24	10		1910
9905	28	10	2610	
9906	28	10		2320
9907	5	20	150	
9922	5	20		65
9908	12	20	511	
9909	12	20		357
9910	24	20	1100	
9911	24	20		953
9912	48	9	4870	
9913	48	9		4350
9914	60	7	8250	
9915	60	7		7500
9920	120VAC	8	6490	Contact WLI

Note: Bi-Color not available in AC voltages

### Electrical and Optical Characteristics (TA = 25°C)

LED Part #	Color	Luminous Intensity (mcd) Typ. @ I <sub>f</sub> (mA)		V <sub>f</sub> Typ. @ I <sub>f</sub> (mA)	Viewing Angle 2 θ 1/2	Peak Wavelength (nm)	
<b>HIGH EFFICIENCY</b>							
1300	Yellow	6.0	10	2.0	10	60°	583
1301	Red	5.5	10	1.9	10	60°	635
1302	Green	5.0	10	2.1	10	60°	565
1313	Orange	5.5	10	1.9	10	60°	600
<b>LOW CURRENT (Use -0001 for resistor code)</b>							
1303	Red	2.1	2	1.7	2	50°	635
1304	Yellow	2.1	2	1.8	2	50°	583
1305	Green	2.3	2	1.9	2	50°	565
<b>BICOLOR (2 leaded)</b>							
8901	Red	20.0	20	2.0	20	60°	627
	Green	16.0	20	2.2	20		565
8903	Yellow	7.0	20	2.1	20	60°	590
	Green	16.0	20	2.2	20		565
<b>BLUE</b>							
8310	Blue	1100	20	3.3	20	30°	468
<b>ULTRA BRIGHT</b>							
1310	Red	55.0	20	1.9	20	45°	635
1311	Yellow	45.0	20	2.1	20	45°	583
1312	Green	45.0	20	2.2	20	45°	565
1315	Red	45.0	20	1.8	20	60°	645
<b>SUPER ULTRA BRIGHT</b>							
8306	Green	150.0	20	2.2	20	50°	565
8312	Yellow	700.0	20	2.0	20	50°	590
8313	Red	800.0	20	1.85	20	50°	660
<b>WHITE</b>							
1331	White	1600	20	3.3	20	34°	N/A

### How To Order

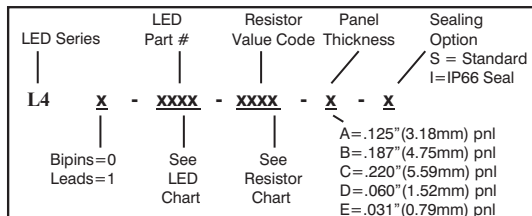

— CLICK HERE —

**REQUEST QUOTE**

www.geminelec.com

PAGE 1 OF 1 PAGES

(800) 882-6414 | sales@geminelec.com